



## PP-180 Factory Recommended Twin Spinner Settings


### New Design – Adjustable Drop Zone Three Blades

#### ProPass *SH* Twin Spinner Suggested Application Guide For 3" Gate

Application	Application Factor	Spinner Speed	Floor Control	Rear Gate	Base Setting	Disc Setting	Application Spread Width
Ultra Light	1	10	7	10 mm (3/8")	1	A	9.1 m (30')
Light	1.5	10	10	10 mm (3/8")	1	A	9.1 m (30')
Medium Light	4	10	10	25 mm (1")	1	A or B	7.9 m (26')
Medium	8	4	10	50 mm (1½")	2	B	6.1 m (20')
Medium Heavy		3.5	10	2"	2	B	15'
Heavy		3	10	3"	3	B	12'
Heavier	29	2.5	10	79 mm (3 1/8")	3	B	8'


Note: Work Vehicle must be operated at an RPM that will achieve recommended hydraulic flow and pressure. Ground speed of 5-8 km/h (3-5 mph)

#### Disc Settings

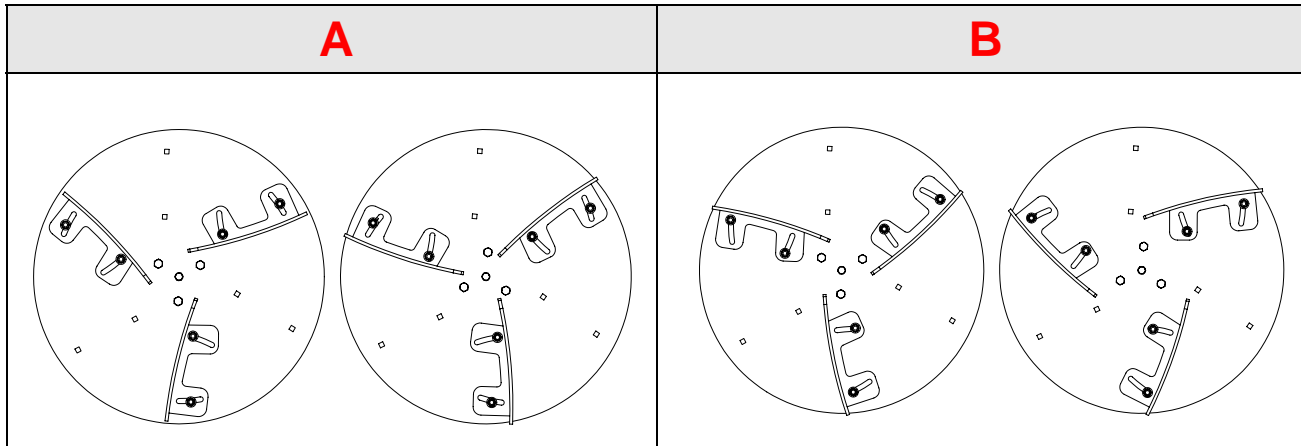

Twin Spinner disk settings

#### Base Settings

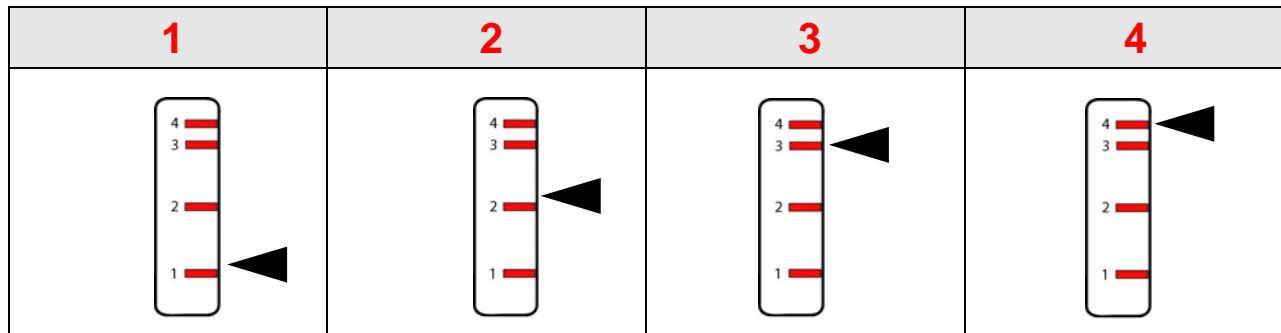

Twin Spinner base settings